

# Standard

## 2 MP IR Bullet Camera



### Features That Make a Difference:

- 1/2.8" Progressive Scan CMOS
- Triple Stream
- 2.8 – 12mm Motorized Varifocal Lens
- 120dB WDR
- 3D DNR
- Up to 50m IR range
- DC12V/PoE
- IP67
- IK10

The Illustra Standard IR Bullet Camera by American Dynamics comes with a motorized Varifocal lens and has several intelligent functions in-built for high-quality video surveillance. Additionally, this Full HD Camera Model ISS02BN1NWIT comes with a rich feature-set that includes 120dB WDR, PoE, and 3D DNR to meet a wide variety of Video Surveillance applications.

### Superior IR Performance

An in-built IR covering up to 50 meter range provides high quality colored images in low light conditions.

### Camera Function

The resolution of the Camera is 1920 × 1080 @25/30fps. It supports H.265/H.264/MJPEG video compression.

In backlight situations, the camera supports 120 dB WDR and Back Light Compensation.

### Built-in Intelligence

With a host of intelligent features and functions, the camera makes video surveillance easy for security professionals.

Intelligent Detection includes comprehensive features such as Line crossing detection, intrusion detection, unattended baggage detection, object removal detection and Face detection.

### ONVIF Support

The Camera supports the ONVIF (profile S & profile G) protocol, Video Stream Recording, live view at different resolutions and bitrate configuration options.

### Ideal for Outdoor Applications

Ingress Protection is at the IP67 level with anti-thunder, anti-surge, anti-static protection that makes this camera ideal for Outdoor Video Surveillance applications. The camera housing is also rated for IK10.



## Specifications


Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.005 Lux @ (F1.2, AGC ON), 0 Lux with IR Color: 0.0068 Lux @ (F1.4, AGC ON), 0 Lux with IR
Shutter Speed	1/3 s to 1/100,000 s, Slow Shutter supported
Day & Night	IR Cut Filter
Digital Noise Reduction	3D DNR
WDR	120dB
SNR	>50dB
3-Axis Adjustment	Pan: 0° to 360°, tilt: 0° to 90°, rotate: 0° to 360°
Lens	
Focal length	2.8 to 12 mm Motorized zoom Lens
Aperture	F1.4
Lens Mount	Ø14
Compression Standard	
Video Compression	Main stream: H.265+/H.265/H.264+/H.264 Sub stream: H.265+/H.265/H.264+/H.264/MJPEG Third stream: H.265+/H.265/H.264+/H.264
H.264 Type	Main Profile/High Profile
H.265 Type	Main Profile
Video Bit Rate	32 Kbps to 16 Mbps
Audio Compression	G722.1/G711ulaw/G711alaw/G726/MP2L2
Audio Bit Rate	32 (G722.1)/ 64Kbps(G711ulaw/G711alaw) 32Kbps (G726)/ 32 to 128kbps (MP2L2)
Intelligence	
Behavior Analysis	Line crossing detection, intrusion detection, unattended baggage detection, object removal detection
Face Detection	Support
Region of Interest	Support 1 ROI per stream
Image	
Max. Resolution	1920 × 1080
Main Stream	50Hz: 25fps (1920 × 1080, 1280 × 960, 1280×720) 60Hz: 30fps (1920 × 1080, 1280 × 960, 1280×720)
Sub Stream	50Hz: 25fps (640 × 360, 352 × 288) 60Hz: 30fps (640 × 360, 352 × 240)
Third Stream	50Hz: 25fps (1920 × 1080, 1280×720, 640 × 360, 352 × 288) 60Hz: 30fps (1920 × 1080, 1280×720, 640 × 360, 352 × 240)
Image Enhancement	Back Light Compensation, Exposure Control
Image Setting	Rotate mode, saturation, brightness, contrast, sharpness adjustable by client software or web browser
Day/Night Switch	Auto/Schedule/Triggered by Alarm
Picture Overlay	Supports LOGO picture overlay on video with 128 x 128 24bit bmp format

Network	
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD full, HDD error, Alarm input, Alarm output
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UDP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv4, IPv6, Bonjour
General Function	One-key reset, anti-flicker, password protection, privacy mask, watermark, IP address filter
ONVIF	Supports PROFILE S, PROFILE G
Simultaneous Live View	Up to 6 channels
User/Host	Up to 32 users 3 levels: Administrator, Operator and User
Interface	
Audio	1 input (line in, 3.5 mm), 1 output (3.5 mm)
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Alarm	1 input, 1 output (max. 12 VDC, 30 mA)
Video Output	1Vp-p composite output (75 Ω/BNC)
On-board storage	Built-in Micro SD/SDHC/SDXC slot, up to 128 GB
Reset Button	Support
General	
IR Range	Up to 50m
Regulatory	UL, CE, FCC
Operating Conditions	Temperature: -30 °C to +60 °C (-22 °F to +140 °F) Humidity: 95% or less (non-condensing)
Power Supply	12 VDC ± 25%, PoE (802.3at)
Power Consumption and Current	12 VDC, 1.2A, max. 14.5W PoE (802.3at, 42.5V to 57V), 0.5A to 0.1A, max. 16.5W
Protection Level	IP67, IK10 TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection
Dimensions	Ø144.13×332.73 mm (Ø5.67"× 13.10")
Weight	Camera: Approx. 1890 g (4.17 lb.)

## Ordering Information

Model Number	Description
ISS02BN1NWIT	2 MP IR Bullet with 2.8-12mm varifocal zoom lens

## Dimensions

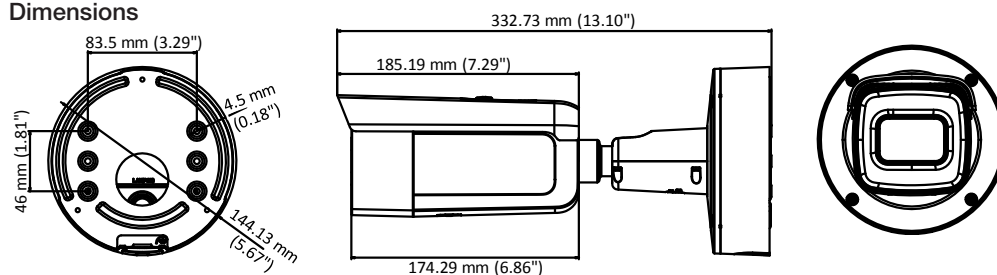

## Related Products



## Approvals



[www.tycosecurityproducts.in](http://www.tycosecurityproducts.in)

© 2018 Tyco Security Products. All Rights Reserved. 07/2018/R01

Tyco and the product names listed above are marks and/or registered marks. Unauthorized use is strictly prohibited. Product offerings and specifications are subject to change without notice. Actual products may vary from photos. Not all products include all features. Availability varies by region; contact your sales representative.

**Tyco Security Products Asia Pacific**  
 Asia Pacific Headquarter Shanghai  
 Tel: +86 400 6858 226

**Australia**  
 Tel: +61 2 8718 2000

**Hong Kong**  
 Tel: +852 2753 3015

**Singapore**  
 Tel: +65 6771 3533

**India**  
 Tel: +91 80 4052 7000

**www.tycosp-apac.com**  
 Email: tycosp-apac@tycoint.com