



Standard 5MP Motorized V/F IR Smart Bullet Network Camera



Key Benefits

- 5MP resolution (2592 × 1944), H.265
- 30fps@5MP, 60fps@2MP
- True day / night
- Up to 70m IR distance with Smart IR
- Auto focus by motorized V/F lens
- True WDR, up to 120dB
- 3D DNR, HLC & BLC
- Defog
- Triple streams
- Smart codec by ROI
- 2-way audio & alarm in/out
- Onboard storage
- Advanced intelligent video analytics
- Face detection / capture
- Smart non-false alarm
- IP67 / IK10

Tyco's Illustra camera range introduces a power packed 5MP Motorized V/F IR Smart Bullet Camera that has several intelligent functions in-built for high-quality video surveillance. The camera comes with a rich set of features which includes True WDR, PoE, and 3D DNR to meet a wide variety of video surveillance applications, capturing high quality colored images in backlight environment.

Authentication Support for Higher Security

Illustra IP cameras have been designed to protect against cyber-threats. Additionally, for greater security, the Camera supports three-level user authentication– management, user and password authorization, IP address filtering and anonymous access. Other vital security features include security certificates such as HTTPS, Support Creating Certificate and lock user IP feature for multiple login error. Basic authentication is supportable in Web browser configuration.

Exceptional Image Quality

With 5MP, 2592 × 1944 resolution @ 30fps the camera produces exceptionally high image quality. It supports H.265/H.264/MJPEG video compression, multi-level video streaming configuration, support Basic/Main/ High Profile H.265 encoding complexity.

This bullet camera can support up to 128 GB Micro SD/SDHC/SDXC card storage, 10M/100M Ethernet Port, Audio I/O, it supports G.711 A/U law, Alarm I/O and CVBS analog output.

ONVIF Support


Camera supports ONVIF (Profile S, G & T) protocol, up to 3 streams providing flexibility of video stream recording, live view at different resolutions and bitrate configuration options.

Specifications


Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Effective Pixels	2592 × 1944
Min. Illumination	0.008 Lux @ F1.2, AGC ON; 0.01 Lux @ F1.6, AGC ON; 0 lux with IR
Shutter Speed	1 s to 1/100,000 s
S/N Ratio	≥52 dB
Angle Adjustment	Any angle
Video	
Video Compression	H.265 / H.264 / MJPEG
H.264 Compression Standard	Base Line / Main Profile / High Profile
H.265 Compression Standard	Main Profile @ Leve4.1 High Tier
Resolution	5MP(2592×1944), 4MP(2560×1440), 3MP(2304×1296), 1080P(1920×1080), 720P (1280×720), D1, CIF, 480×240
Max. Frame Rate	30fps @ all resolution, 60fps @ 1080P
Video Bit Rate	128 Kbps - 10 Mbps
Multiple Streaming	Triple Streams
Main Stream	60Hz: 5MP(1-30fps) / 4MP(1-30fps) / 2K(1-30fps) / 3MP(1-30fps) / 1080P(1-60fps) / 720P(1-30fps) 50Hz: 5MP(1-25fps) / 4MP(1-25fps) / 2K(1-25fps) / 3MP(1-25fps) / 1080P(1-50fps) / 720P(1-25fps)
Sub Stream	60Hz:720P/D1/CIF /480×240 (1-30fps) 50Hz:720P/D1/CIF/480×240 (1-25fps)
Third Stream	60Hz : D1 (1-30fps) / 480x240 (1-30fps) / CIF (1-30fps) 50Hz : D1 (1-25fps) / 480x240 (1-25fps) / CIF (1-25fps)
Smart Codec	ROI, 3 zones
Quality Control	Five levels under VBR; Freely adjustable under CBR
Image Setting	time stamp, text overlay, flip & mirror, ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, white balance, video rotation, Scheduled profile settings, AGC etc.
Audio	
Audio Communication	Bi-directional audio (2-way)
Audio Compression Format	G711ulaw / G711alaw
Audio Bit Rate	128kbps
Lens	
Focal Length	2.8 - 12 mm, motorized varifocal zoom lens, auto focus
Iris Type	DC-Iris
Field of View	Horizontal: 92.7°~ 29.8°, Vertical: 76.4°~ 22.6°
Lens Mount	Ø 14
Network	
Network Protocol	TCP/IP, UDP, DHCP, NTP, RTSP, PPPoE, SMTP, FTP, SNMP, UPnP, Unicast, Multicast, ICMP, HTTP, HTTPS, DNS, DDNS, RTP, RTCP, IGMP, 802.1X, QoS, IPv4, IPv6, Bonjour, ARP
Cyber Security	HTTPS / IP Filter / IEEE 802.1X / Blacklist & whitelist / account security / telnet access control / serial password
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Remote Monitoring	Webviewer browsing, Holis Pro, Holis Lite, ExacqVision, victor

API	ONVIF Profile (S, G & T), HAPI3, iAPI3			
Operational				
Day & Night	IR cut filter with auto switch			
Wide Dynamic Range	True WDR, 120dB			
IR Distance	Up to 70m			
Digital Zoom	Yes			
Image Features	Defog, BLC, HLC, 2D/3D DNR			
Corridor Pattern	Yes			
Video Privacy	4 zones video mask			
Intelligent Video Analytics	Perimeter Protection	Target Counting	Exception Detection	Face Detection
	Line crossing, region Entering/Exiting/ Intrusion (human/motor vehicle/ non-motor vehicle classification)	Line crossing human/ motor vehicle/non-motor vehicle counting	Scene change, video blur and video color cast detection	Face detection and face capture
Alarm Triggers	Motion detection, Intelligent video analytics, Network disconnect, video tampering, IP address conflict, illegal login, HDD full, HDD error, Alarm input, Alarm output			
Edge Storage	Built-in micro SD card slot, up to 128GB			
Backfilling	Supported			
Interface				
Network	1 RJ45 10M/100M self-adaptive ethernet port			
Audio	Line IN × 1, Line OUT × 1			
Video Output	CVBS video output (BNC × 1)			
Onboard Storage	Built-in micro SD/SDHC/SDXC slot			
Alarm	Alarm IN x 1, Alarm OUT x 1			
Hardware Reset	Yes			
Environmental				
Operating Temperature	- 30 °C to 60 °C			
Operating Humidity	95% or less (non-condensing)			
Ingress Protection	IP67			
Vandal Resistance	IK10			
General				
Power Supply	DC12V / PoE			
Power Consumption	< 12W			
Dimensions (mm)	278.7× 95.9× 94.4			
Material	Metals			
Weight	≈ 1.15kg			
Installation	Wall mounting, ceiling mounting			
Regulatory				
Product Certification	Safety: CE, FCC, EN:60950-1, IS-13252 (Part 1):2010, BIS Registered, IEC 60950-1:2005, Immunity: CE,FCC			

Dimensions

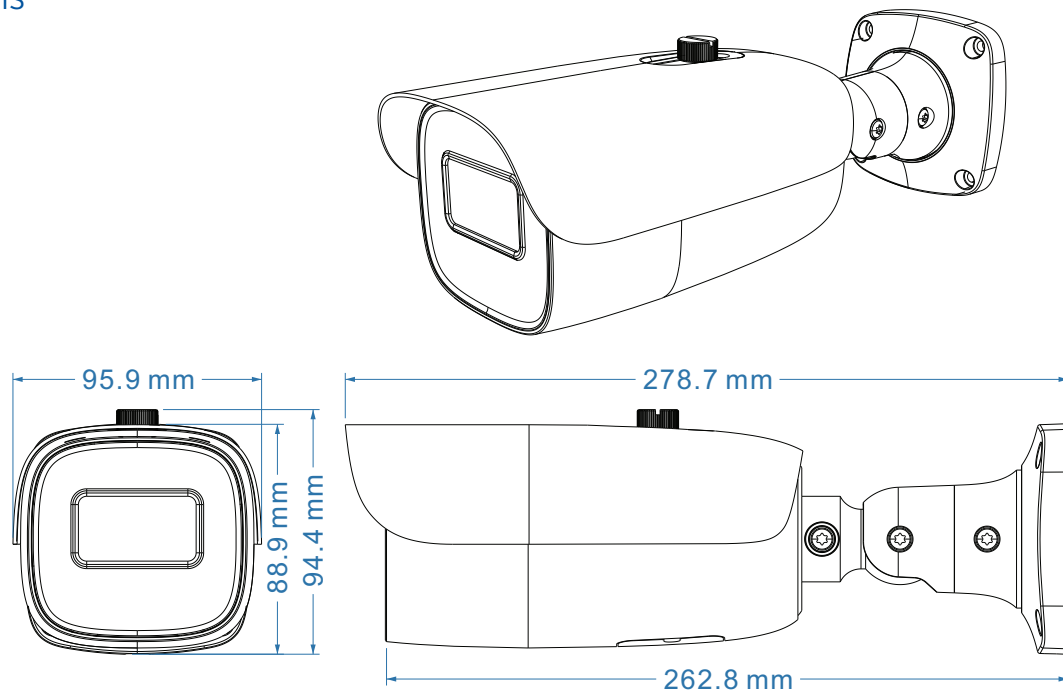

Accessories

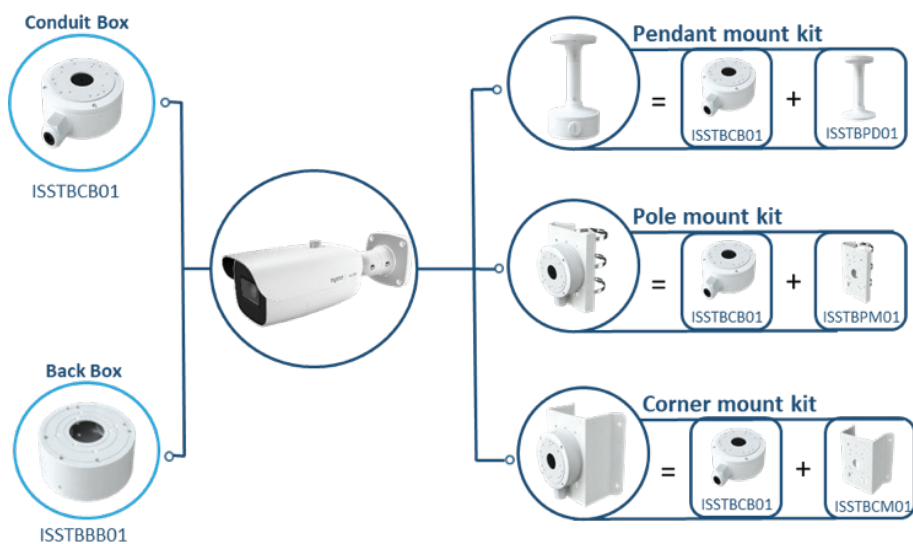

Ordering Information

	Model Number	Description
Camera	ISIN-B05M031-N-V1	H.265 5MP Motorized V/F IR Bullet N/W Camera, 2.8-12mm, 70M IR, Micro SD, DC12V/PoE, IP67/IK10, Smart IVA

Approvals



About Johnson Controls

Johnson Controls is a global diversified technology and multi-industrial leader serving a wide range of customers in more than 150 countries. Our 120,000 employees create intelligent buildings, efficient energy solutions, integrated infrastructure and next generation transportation systems that work seamlessly together to deliver on the promise of smart cities and communities. Our commitment to sustainability dates back to our roots in 1885, with the invention of the first electric room thermostat.

For additional information, please visit www.tycosecurityproducts.in or follow Illustra on LinkedIn, Twitter, and Facebook.